


# RACKS(S45C-D)

SR

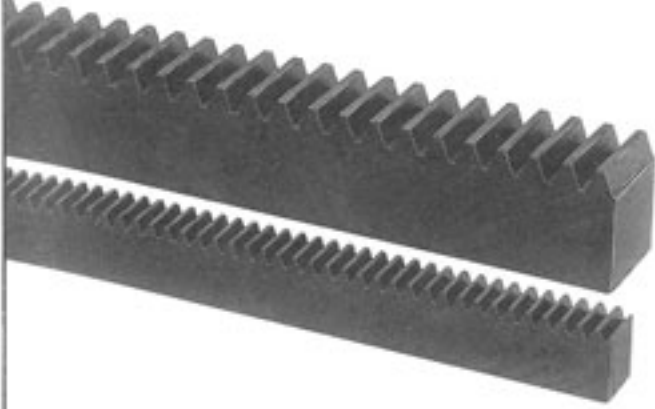

■Racks(*m*1~*m*8) Material: S45C-D(Steel) 20° Pressure Angle

Over All Length: 300 mm

Catalog No.	<i>m</i>	A	B	C	D	Effective Teeth No.	Weight kgf
SR1 - 300	1	300	10	12	11.0	95	0.25
SR1.5- 300	1.5	300	15	20	18.5	63	0.73
SR2 - 300	2	300	20	25	23.0	48	1.2
SR2.5- 300	2.5	300	25	30	27.5	38	1.8
SR3 - 300	3	300	30	35	32.0	31	2.5

Over All Length 500 mm

SR1 - 500	1	500	10	12	11.0	159	0.42
SR1.5- 500	1.5	500	15	20	18.5	105	1.2
SR2 - 500	2	500	20	25	23.0	80	1.9
SR2.5- 500	2.5	500	25	30	27.5	63	2.6
SR3 - 500	3	500	30	35	32.0	52	3.8
SR4 - 500	4	500	40	45	41.0	39	6.3
SR5 - 500	5	500	50	50	45.0	31	8.3
SR6 - 500	6	500	60	60	54.0	26	12.7

Over All Length 1000 mm

SR1.5-1000	1.5	1000	15	20	18.5	212	2.2
SR2 -1000	2	1000	20	25	23.0	160	3.6
SR2.5-1000	2.5	1000	25	30	27.5	128	5.3
SR3 -1000	3	1000	30	35	32.0	106	7.6
SR4 -1000	4	1000	40	45	41.0	80	12.5
SR5 -1000	5	1000	50	50	45.0	64	17.5
SR6 -1000	6	1000	60	60	54.0	53	25.4
SR8 -1000	8	1000	75	75	67.0	40	39

Over All Length 1500 mm

SR1.5-1500	1.5	1500	15	20	18.5	317	3.4
SR2 -1500	2	1500	20	25	23.0	238	5.4
SR2.5-1500	2.5	1500	25	30	27.5	191	8.0
SR3 -1500	3	1500	30	35	32.0	159	11.4
SR4 -1500	4	1500	40	45	41.0	119	19
SR5 -1500	5	1500	50	50	45.0	95	26
SR6 -1500	6	1500	60	60	54.0	79	38